

Инструкция по настройке ADSL модема Zyxel P-660 Series v1



1. Откройте на компьютере веб браузер, например Internet Explorer.
2. В строке адреса наберите 192.168.1.1
3. Появится предложение ввести пароль для входа в меню модема. Введите пароль 1234.



Далее будет предложено сменить стандартный пароль 1234. Вводим новый пароль с подтверждением и продолжаем настройку.



4. После этого вы увидите основную страницу веб-конфигуратора модема. Нажмите на “WAN”

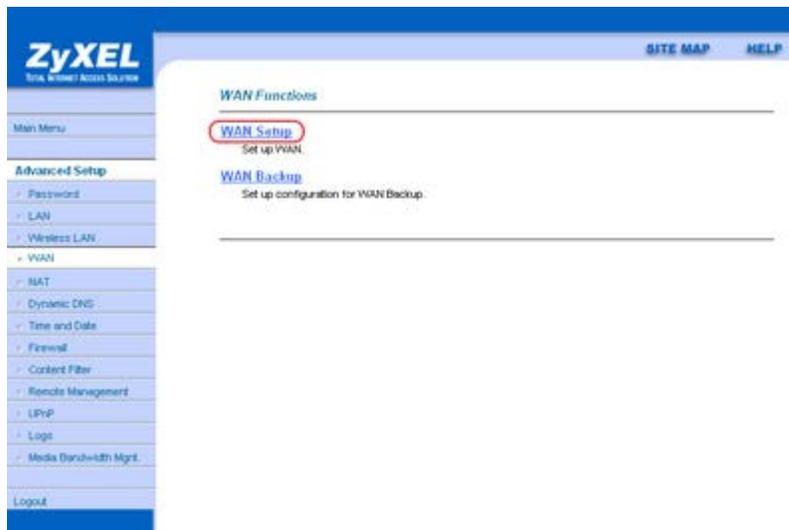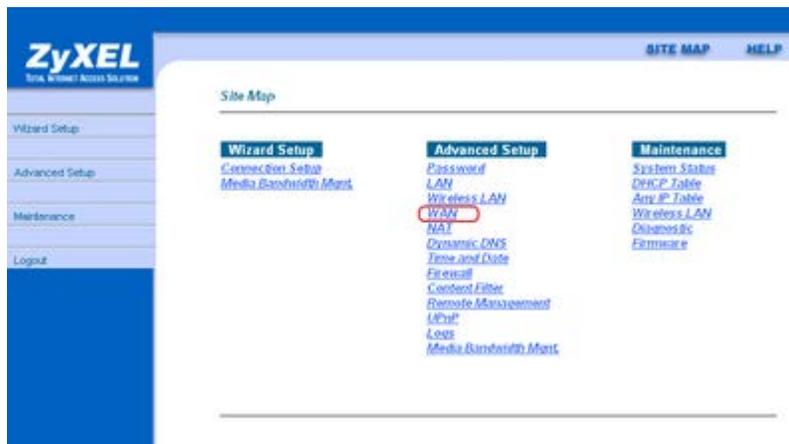

Выбирете “WAN Setup”

ZyXEL
Time, Internet Access Solutions

SITE MAP HELP

WAN - WAN Setup

Name: MyISP

Mode: Routing

Encapsulation: PPPoE

Multiplex: LLC

Virtual Circuit ID:

VPI: 0

VCI: 40

ATM QoS Type: UBR

Cell Rate:

Peak Cell Rate: 0 cell/sec

Sustain Cell Rate: 0 cell/sec

Maximum Burst Size: 0

Login Information:

Service Name:

User Name: Elitecom

Password: *****

IP Address:

Obtain an IP Address Automatically

Static IP Address

IP Address: 0.0.0.0

Connection:

Nailed-Up Connection

Connect on Demand


Max Idle Timeout: 0 sec

PPPoE Pass Through: No


Zero Configuration: No

Back Apply Cancel

Откроются настройки WAN - интерфейса модема. Выставляем параметры как показано на рисунке. В полях User Name и Password введите логин и пароль для доступа в интернет, выданные компанией Элитком. Поле Service Name оставляем пустым, значения параметров VPI и VCI (0 и 40 соответственно). Кнопка Apply.

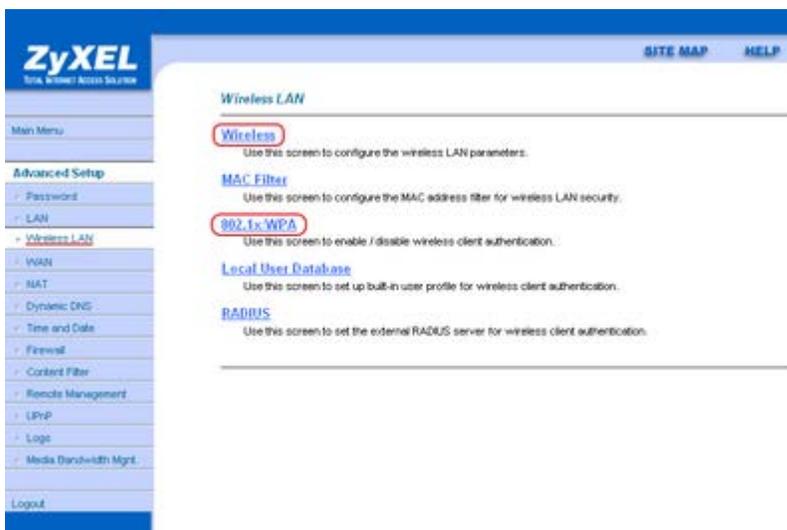

Переходим в меню по настройке беспроводной сети Wireless LAN которое выглядит как на рисунке выше. Нажмите на первый пункт "Wireless". Выставляем параметры как показано на рисунке. Кнопка Apply.

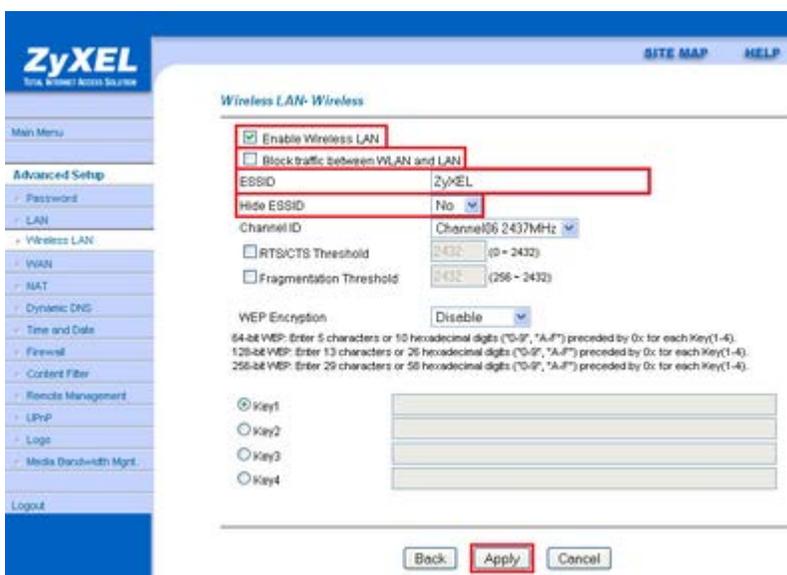

Продолжение на следующей странице

Далее нажмите на 802.1x WPA и укажите параметры как на рисунке.

The screenshot shows the ZyXEL web management interface for configuring Wireless LAN - 802.1x WPA. The interface includes a sidebar menu on the left with options like 'Main Menu', 'Advanced Setup', 'Password', 'LAN', 'Wireless LAN', 'WAN', 'NAT', 'Dynamic DNS', 'Time and Date', 'Firewall', 'Content Filter', 'Remote Management', 'UPnP', 'Logs', 'Media Bandwidth Mgmt', and 'Logout'. The main content area is titled 'Wireless LAN - 802.1x WPA' and contains the following configuration fields:

802.1x Authentication	
Wireless Port Control	Authentication Required
ReAuthentication Timer	1800 (In Seconds)
Idle Timeout	3600 (In Seconds)
Key Management Protocol	
Key Management Protocol	WPA2-PSK
Pre-Shared Key	пароль для wi-fi
<input type="checkbox"/> WPA Mixed Mode	
WPA Group Key Update Timer	1800 (In Seconds)

At the bottom of the configuration area, there are three buttons: 'Back', 'Apply', and 'Cancel'.

Приятного использования интернета от компании SCS Telecom.